

## Key Features

- 600W @ 8Ohm (Power Handling)
- 10" Woofer + 1,3" Compression driver.
- Cabinet built from high density fiberboard.
- Euroblock connector (in/out).
- 14x M8 screw hanging points.
- Available in black and white colours.
- U bracket included.
- Dimensions 300 x 486 x 250mm | 11.5kg.

## Applications

 Retail & Commerce Hospitality Education Houses of worship Sports Venues Industry & Corporate

MINO 10 E2 is a two-way passive loudspeaker with 600 W power handling at 8 Ohm, made of high-density fiberboard. It consists of a 10" loudspeaker and a 1.3" compression driver and is equipped with terminal connections. This model is perfectly suited for the musical ambience of a multitude of spaces. The MINO E2 loudspeakers substantially improve the sound quality and have been specifically designed for installation and, as part of the refurbishment, the enclosures have been improved with multiple mounting points. In addition, the two available colours (black and white) make it easy to integrate the loudspeakers into any installation, whether it is a commercial space, a corporate environment or a leisure space.



## Technical Specifications

|                      |                                                    |                   |       |
|----------------------|----------------------------------------------------|-------------------|-------|
| Type                 | 2-Way Passive Loudspeaker                          |                   |       |
| LF Transducer        | 1x 10" Woofer (2" Voice Coil)                      |                   |       |
| HF Transducer        | 1x 1,3" Tweeter (1" Voice Coil)                    |                   |       |
| Power Handling       | 600 W                                              | Nominal Impedance | 8Ω    |
| Connectors           | Euroblock (4 pin)                                  |                   |       |
| Frequency Range      | 65 Hz - 19 kHz                                     |                   |       |
| Sensitivity          | 91 dB                                              |                   |       |
| SPL max              | 118 dB                                             |                   |       |
| Coverage angle       | 70° x 100°                                         |                   |       |
| Cabinet construction | Built from high density fiberboard                 | Grille            | Steel |
| Mounting             | U bracket / Mounting Points /Suggested accessories |                   |       |
| Dimensions           | Size (W x H x D)<br>300 x 486 x 250 mm             |                   |       |
| Net Weight           | 11.5 kg                                            |                   |       |

## Rear Panel (View)




## Response curve (SPL/Impedance vs. Frequency)

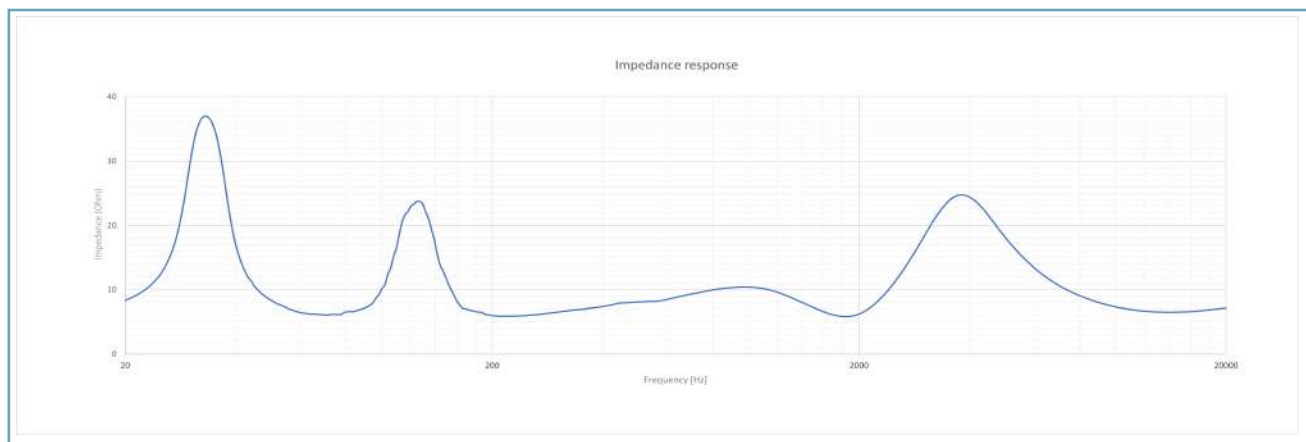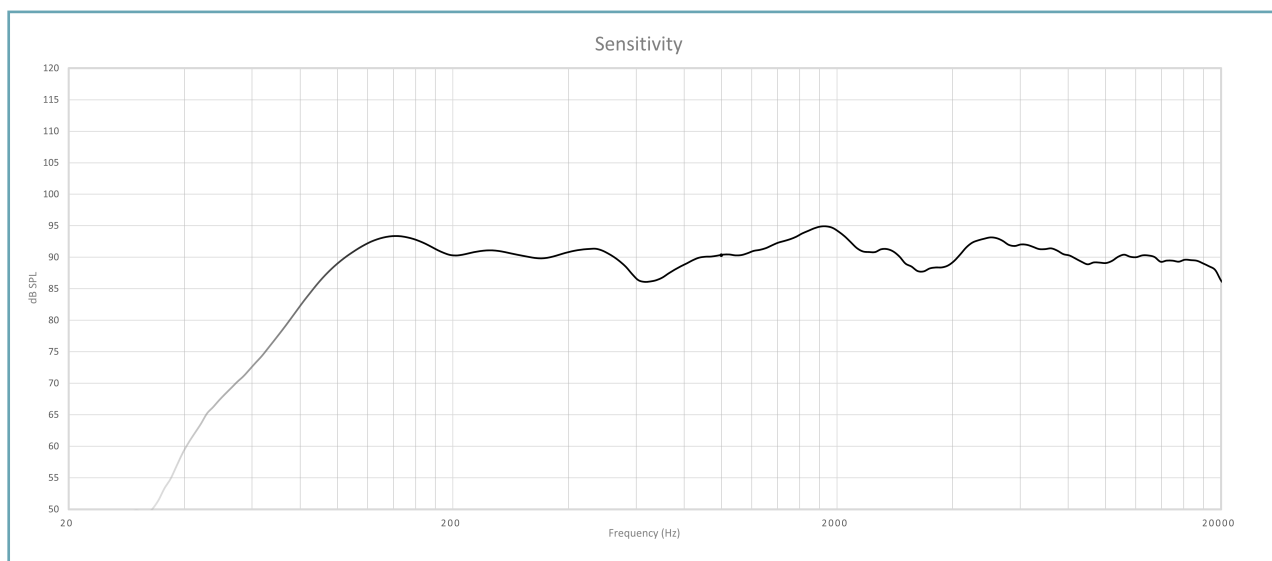

**Polar Patterns**


*HORIZONTAL*

**63 Hz - 125 Hz - 250 Hz**

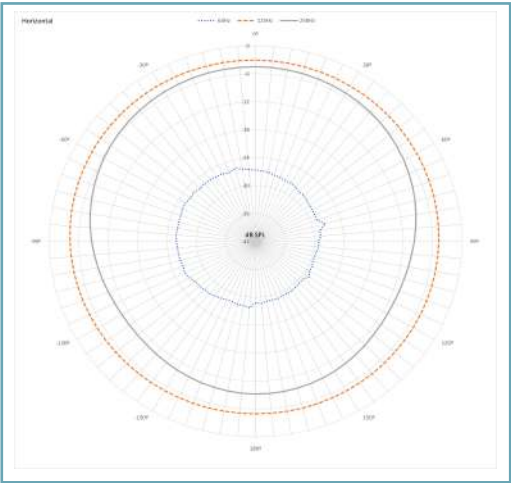


*VERTICAL*


**63 Hz - 125 Hz - 250 Hz**

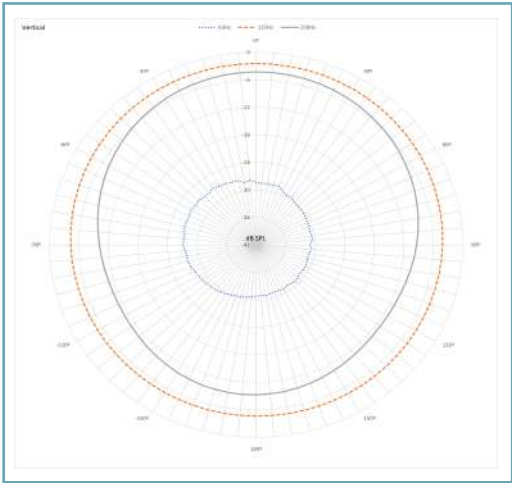


**500 Hz - 1kHz - 2kHz**

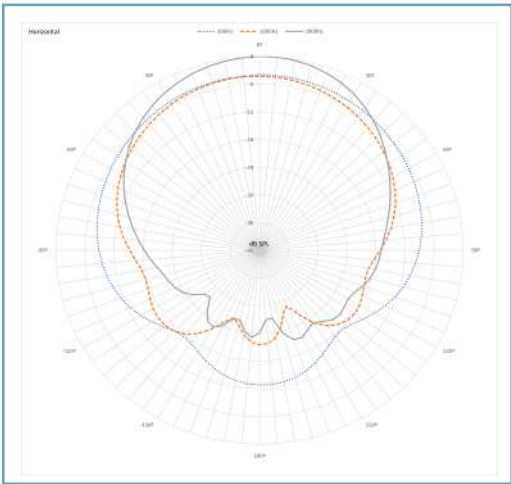


**500 Hz - 1kHz - 2kHz**

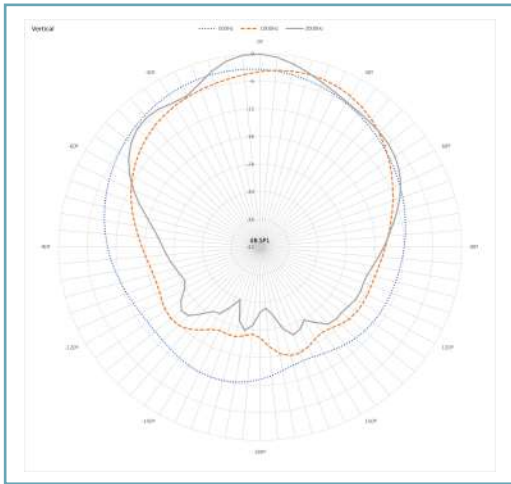

**4kHz - 8kHz - 16kHz**

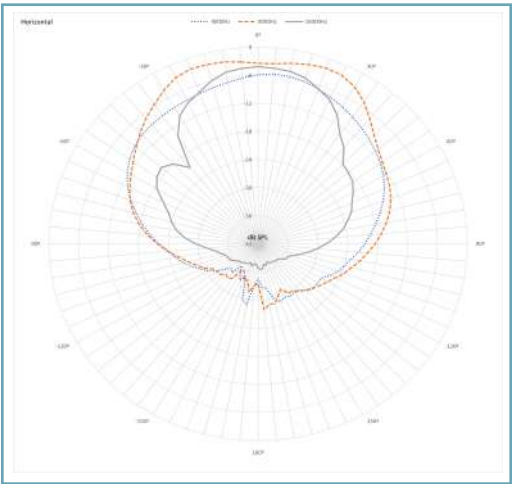


**4kHz - 8kHz - 16kHz**

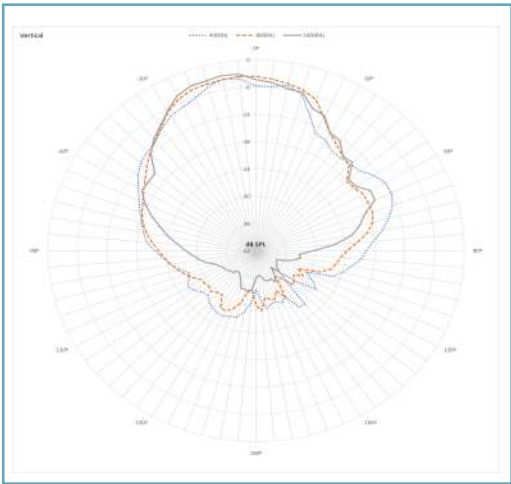


## HF Coverage

The models MINO 6 E2, MINO 8 E2 & MINO 10 E2, allow to rotate the HF diffusor to obtain a different coverage angle.

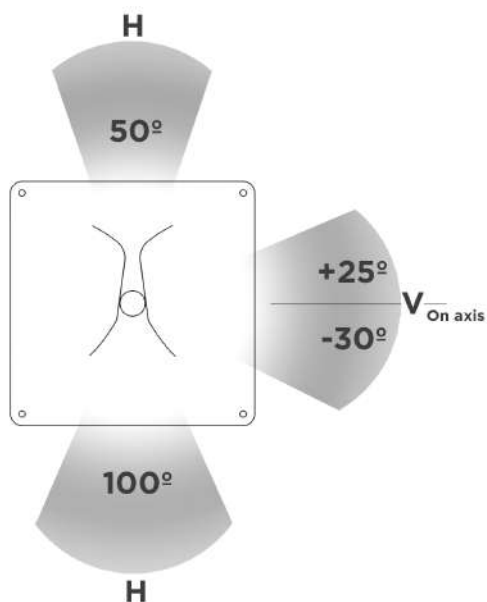



## Technical Drawings

Dimensions in mm.

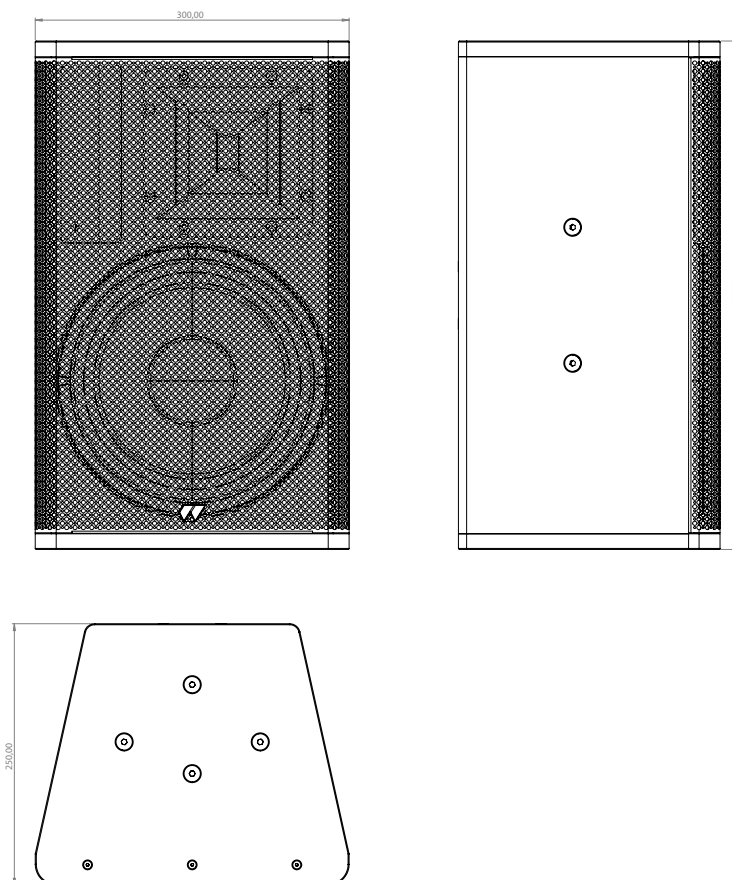


## U bracket (included)


Each MINO E2 loudspeaker includes a metal U bracket for fixation.

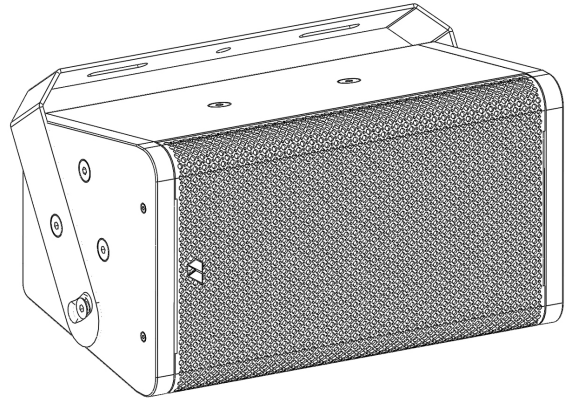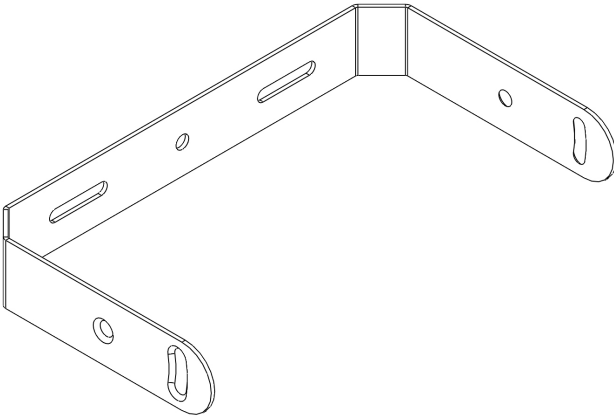


## Suggested Accesories (Not included with the product)

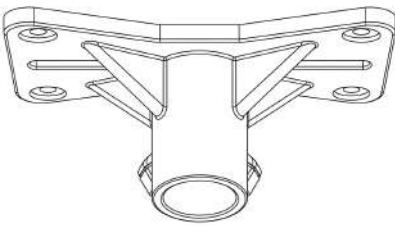


**SH 606**

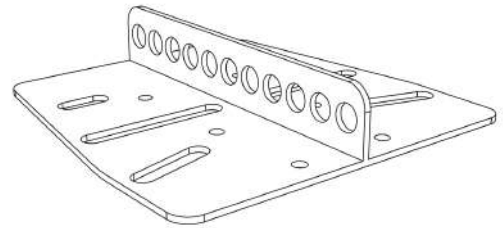

**UBS 1**

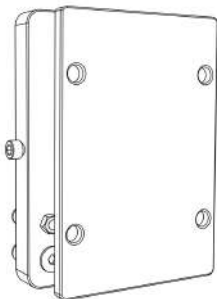

**SPB 20**

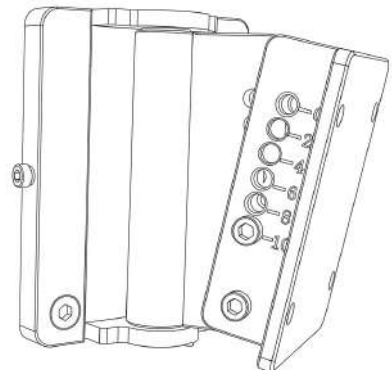

**SPB 22**


## Architectural & Engineering Specifications

The MINO E2 speaker series consists of four satellites (5', 6', 8' and 10' models with dedicated tweeters).

Made from wood with a durable textured paint finish, they feature multiple mounting points for versatile positioning and are available across the range in black and white finishes, ensuring they blend seamlessly into any environment, whether commercial, corporate or entertainment venue.

The Mino E2 speakers have been designed specifically for installation applications and, as part of their revamp, the enclosures have been updated with multiple mounting points, offering installers more options when deciding how to install the speakers.

This versatility ensures optimal installation in any type of environment, with a sleek design that adapts to various mounting needs. In addition, the speakers now feature both terminal and PowerCon connections, providing a professional solution that simplifies installation

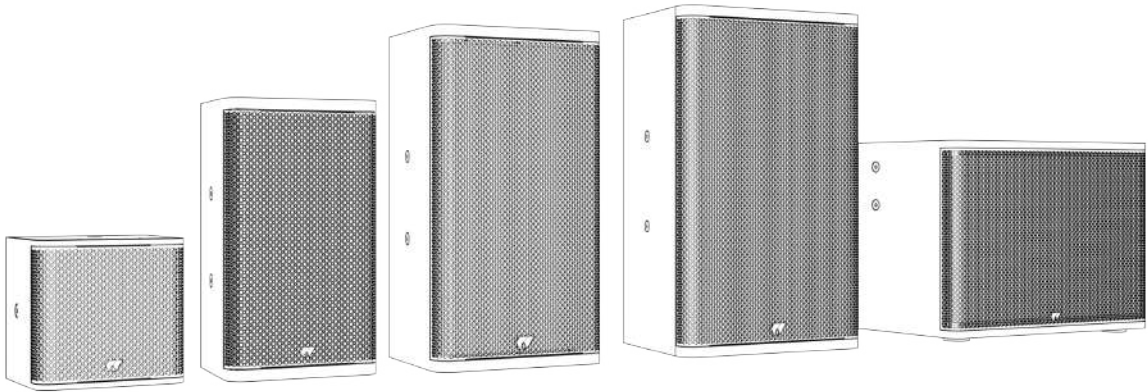

## Support & Technical Requests

All products features are subject to variations due to production tolerances.

We reserve the right to change specifications or improvements in the design or manufacturing that may affect these product specifications without notice, as a part of our policy to continually improve our products.

For technical queries, please contact with your supplier, reseller, distributor or visit our website:

[www.workpro.es](http://www.workpro.es)

### Copyright

Technical specifications and availability subject to change without notice.

**WORKPRO®** reserve all rights in this document and in the subject thereof. By acceptance of the document the recipient acknowledges these rights and undertakes not to publish the document nor the subject thereof in full or in part, nor to make them available to any third party without our prior express written authorization, nor to use it for any purpose other than for which it was delivered to him.

Version 1.0

**EQUIPSON, S.A.** Av. del Saler, 14. Pol. Ind. L'Alteró, Silla 46460 Valencia – Spain. Tel: +34 961216301 [equipson@equipson.es](mailto:equipson@equipson.es)